


HIGHEST QUALITY OF YOUR PRODUCT ENSURED WITH RIGHT MEASURING INSTRUMENTS.

TORQUE METERS

- In a display board, "measurement mode", a "measurement unit", "the maximum, the minimum, an average, etc.", etc. display.
- Change of Measurement Unit Can be Performed N-m, Kgf-cm, lbf-in Etc.
- Setup of Various Numerical Values Can be Easy and Can Carry Out Speedily.
- Calculation of Maximum, Minimum, and Average Became Intelligible.
- The call of the saved data became easy. The output of data also became intelligible.
- Fault charge protection. It is pilot-lamp lighting during charge.
- Data Output is USB Form (B Type).
- Memory Data are 800 Affairs
- Real-time Output is Every 1 / 180 Seconds.
- GOOD/NG is checked with an LED lamp.




**ELECTRIC SCREW DRIVER
TORQUE WRENCHES**



The best for everyday check of an electric driver. Wide measurement range (0 - 8000digit), it corresponds to various set torques Can measure without inversion rolling-back work efficiently by OW joint (PAT.P).

MEASURING JOINT OW series

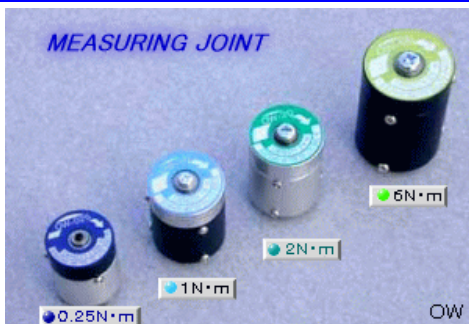

Since our company developed the buffer with little influence of fricative, stable measurement could be performed Moreover ,it does not need to reverse-rotate at the time of measurement, and work efficiency improved. **SEE MORE DETAIL FURTHER**

Specification	DI-9M-8	DI-9M-08
Measuring range (at the time of Track)	0.030-8 N·m	3.0-800 mN·m
	0.30 ~ 80 kgf· cm	0.030 ~ 8 kgf· cm
	0.30 ~ 70 lbf· in	0.030 ~ 7 lbf· in
Accuracy	±0.5% (499 digit or less ±3digit)	
Display	The 4 figures digital display of LCD	
The measurement direction	CW-CCW (right and left)	
Measuring mode	Track/Peak/Peak-Down	
Zero return by one touch	Return to zero by pressing clear button.	
High and low limits judging function	High and low value are measurement within the limits, and can be set up.	
Real-time Output	Load torque value is outputted every about 1/ 180 second .	
The Maximum, the minimum, and the average value display	The maximum, the minimum, average value, and the data number of 30 data are displayed. It saves to ten channels.	
Data transfer	ASCII format (baud rate 19200)	
Auto power save	10 minutes no use, automatically switch off.	
Power supply	Ni-Cd chargeable battery 1.2V × 5cells 700mAh	
Charging time	From empty - Less than 6hours	
Continuous working time	About 12hours	
clearance	It is a display clearance in set-up time. (0.1 - 3.0 sec)	
Socket size	20mm/ 9.5mm	
Dimension / Weight	W:155xD:125xH:55 / About 1kg	
Accessories (one piece each)	AC/DC adaptor (230V.)	
	Exclusive receipt case	
	An inspection report, a proofreading certificate, traceability system figure	
Recommend buffer accessories	Measuring joint OW-20/OW-60	Measuring joint OW-025/OW-10
	Cube (with a 5th page screw hole) 20x20x20 (M2.6/M3/M4/M5/M6 Tap processing)	
	Data Cable	

※Do not use for measurement of impact tool. Do not apply more than the specified

- **About torque joint OW series:** By the original method of our company, it binds tight and measurement is completed only by the work of a direction. (Inversion operation is unnecessary) Moreover, since joint with a bit is the screw head, where a bit is attached, it can measure. Since it has structure which does not need to consider the influence of friction which had become a problem by the conventional method, the torque stabilized over the long period of time is manageable.
- It can measure, with a bit set.
- The torque check of the direction of bolting can be performed easily. (Return is not needed)
- Since it has structure which absorbs anti-power, there is no influence on a power



Specification		OW-0 2 5	OW-1 0	OW-2 0	OW-6 0
Measuring range (Nm)		0.25	1	2	6
Mechanical life (times)		10,000	8,000	5,000	5,000
Outer diameter size (mm)	Bit engagement part (screw part)	M2.6 cross recess screw	M3 cross recess screw	M4 cross recess screw	M6 cross recess screw
	Outside diameter / Height	φ28 / 44	φ28 / 44	φ32 / 51	φ38 / 69
	Installation	20square ×4(t)			



www.advancetechonline.in

ADVANCE TECH SERVICES PVT. LTD. 709-710, GD-ITL Towers, B-8, Netaji Subhash Place, Pitampura, Ring Road, New Delhi 110 034 Ph : 011-47002024 upto 27, Fax : 011-47002029E-Mail : info@advancetechonline.in web:www.advancetechonline.in **B.O : • Bangalore • Pune**

PRODUCT RANGE: Soldering Desoldering for SMD/PTH, Solder POT, Electric Screw Drivers, Pneumatic Screw Driver, Torque Meter, Screw Torque deciders, Screw Feeders, Balancer, Torque Arm, Air Dispenser, Air Free Dispenser, Syringes and Barrel for dispenser, Flux, Spray Fluxer, Desolder Wick, Static Charge Meter, Ionizers, Ion Gun, Illuminated Magnifiers, Hand tools (Cutter, strippers, Pliers, crimper, Cable cutters etc.. ESD Products, Peelable Mask, Solder Bath Treatment, Rework Pens (Conductive pen, flux pen, green over coat pen, conformal coating remover pen), Imported stations soldering bits, Bit Cleaning sponge, Screw driver bits and many more.....