

NEW

## Janome's PCB Depaneling Desktop Robot - JR2000NERT Series - "Drive away defective items !"

### All-in-one package

The robot unit, electric router, special software, and dust collecting kit are including in a package !

### Minimizes defective


The double-check system with the position error detection function of the robot and the router bit sharpness checking function minimizes defective items !

### Available in 3 types

JR2203NERT, JR2303NERT, and JR2403NERT are available for varied operation ranges.

### Simple teaching

Interactive teaching common to the JR Series is easy for anyone !  
Simply enter the preset items one by one, now it's ready to run !

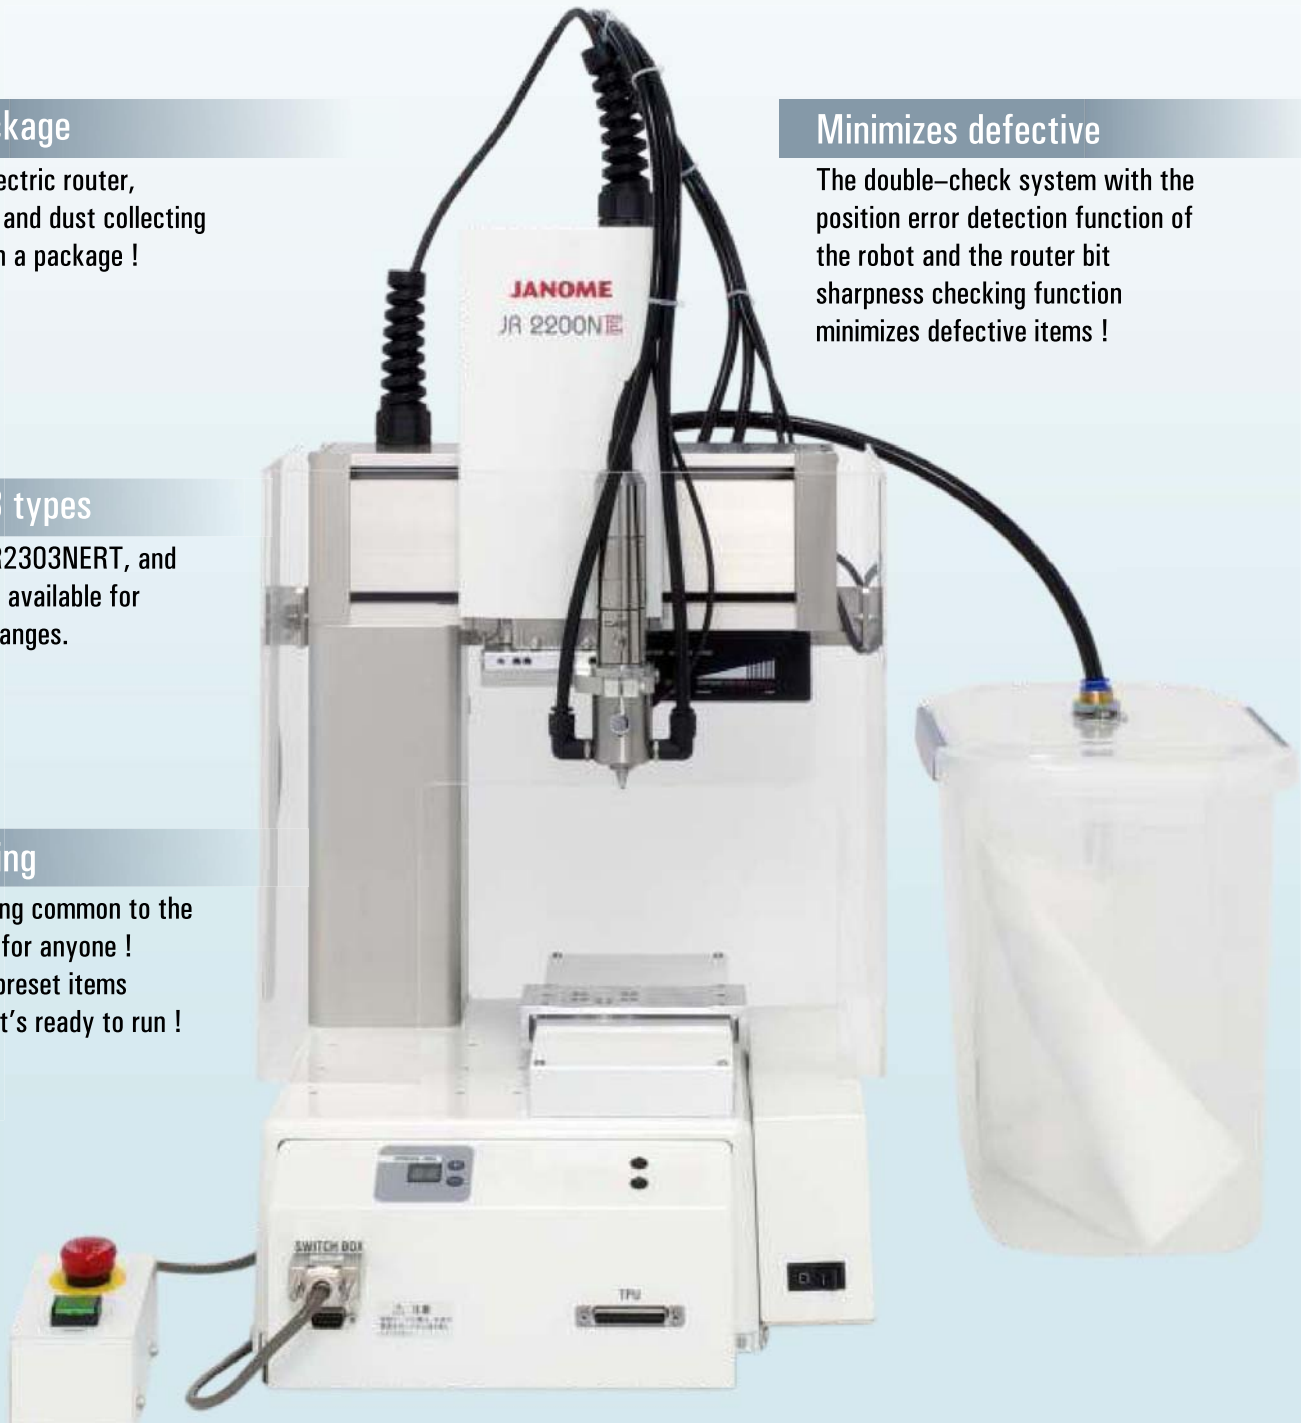

## < Specification >

Item		Model	JR2203NERT	JR2303NERT	JR2403NERT
Operation Range	X- and Y-axes		200 x 200mm	300 x 320mm	400 x 400mm
	Z-axis		50mm	100mm	100mm
Cutting Range (Limit value)	X- and Y-axes		200X195mm	300 x 320mm	400x400mm
	Z-axis		45mm	95mm	95mm
External Dimensions W x D x H (Not including protrusion parts)			350x436x615mm	585 X580x650mm	646 X641 x650mm
Body Weight			26kg	39kg	47kg
Teaching Method		Remote teaching (JOG) / Manual data input (MDI)			
Applicable Board Materials		Glass epoxy, paper phenol laminate, etc. (Maximum thickness: 1.6mm)			
Depaneling Locus Accuracy		0.2mm (guide value when router bit: $\Phi$ 0.8mm, cutting speed: 10mm/sec, PCB thickness: 1.6mm)			
External Serial Interface		RS422: 1ch (for teaching pendant) RS232C: 1ch (for PC: COM1) RS232C: 2ch (for external devices: COM2, COM3) (optional)			
External Input/Output		I/O-SYS IN: 16/OUT: 16 I/O-1 IN: 8 / OUT: 8 (including 4 relay contacts) (optional)			
Power Supply Voltage		AC90 - 132V / AC180 - 250V (single-phase)			
Power Consumption		340VA			
Vacuuming Method		Ejector			
Supplied Air Pressure		0.5Mpa (5kgf/cm <sup>2</sup> ) Dry air			
Air Consumption		200Nℓ/min or more			
Tool Specifications		DC brushless motor, router bit diameter: 0.8mm, collet chuck			
Accessories		Operation manual, software (factory installed), dust collecting kit, router bit (consumable), spare vacuum nozzle			

- Specifications are subject to change without prior notice to improve product quality.

2009.1

# JANOME

Janome Sewing Machine Co. Ltd.  
Industrial Equipment Sales Division  
1463 Hazama-machi, Hachioji-shi, Tokyo 19-0941 JAPAN  
Tel.: +81-42-661-6301 Fax: +81-42-661-6302  
E-mail : j-industry@gm.janome.co.jp  
URL: <http://www.janome.jp/industrial.html>

## Distributor