

TEMP. CONTROL LEAD FREE STATION MODEL RX-802AS

- LATEST TECHNOLOGY TIP HEATER INTEGRATED.
- ULTRA LONG LIFE TIPS.
- PROGRAMABLE TIME/TEMP. SLEEP MODE.
- FAST HEAT RECOVERY TIME.
- LOWEST RUNNING COST.
- SAVE LOT IN TERM OF EFFICIENCE OF OPERATOR DURING WORK
- MAINTAIN TEMP. ACCURACY $\pm 3^{\circ}$ C.



Features/Specification :


- Excellent Heat Recovery (Patent Pending).
- Compact, high output heater (72W), integrated into tip, controlled by high sensitivity sensor. Even during continuous operation, the tip temperature remains stable with minimum heat loss.
- Perfect for working with high melting point lead-free solders.
- New Ergonomic Design Hand piece (Patent Pending)
- Comfortable usability, easy handling, soft power cord.
- Shorter distance from grip to tip. Perfect for micro Soldering.
- Fastest in its class (Patent Pending)
- **Reaches set temperature in 6 seconds.**
- Easy-change tip (Patent Pending) Slide-change tip. No tools or heat resistant pads needed.
- Thick iron plating for lead-free soldering complete lineup of tips with thick iron plating to prevent erosion.
- Anti-oxidation tip (Patent Pending): New addition. Fine solder coated grooves protect tip from atmospheric oxidation.
- Low Heat Hand piece (Patent Pending) : Completely new design thermal insulation hand piece construction reduces heat transfer to the grip. (Based on **goot**[®] measurement methods)
- **Programmable time temperature sleep mode function to save power and longer tip life.**
- **Auto Power off function is programmable (if program to 3 Min no soldering it will switch off after 3 min)**
- Programmable for time to one solder joint (if time on that joint is more than set it will give beep signal)
- Keypad lock function (Patent Pending): Tamper-proof keypad lock software lock.
- Input Voltage 230 - 240V AC • Power Consumption 80W • Temperature Accuracy $\pm 3^{\circ}$ C • Soldering Unit Voltage Consumption 24V/72W • Temperature Setting Range : 50- 450 $^{\circ}$ C • Dimension: Soldering Unit 158mm (w/o cord bushing) Control Unit 146(L) X 115(W) X 98(H)mm • Weight Soldering Unit Approx. 27g (w/o cord) Control Unit Approx. 1.8kg (w/o cord) • Leak Voltage Less than 2mV • Ground Resistance Less than 2 • Control Unit to Soldering Unit Cord Length 1.2m
- Power Cord Length 1.2m (3 core cable) ground plug • Ultra long life tips in variety of shape

How to change Tip



To remove the soldering iron tip, slide the lever in the direction of the arrow. The tip will then protrude from the hand piece and can be removed easily by holding and pulling the plastic housing of the integrated tip/heater.

Soldering Tips for RX-802AS

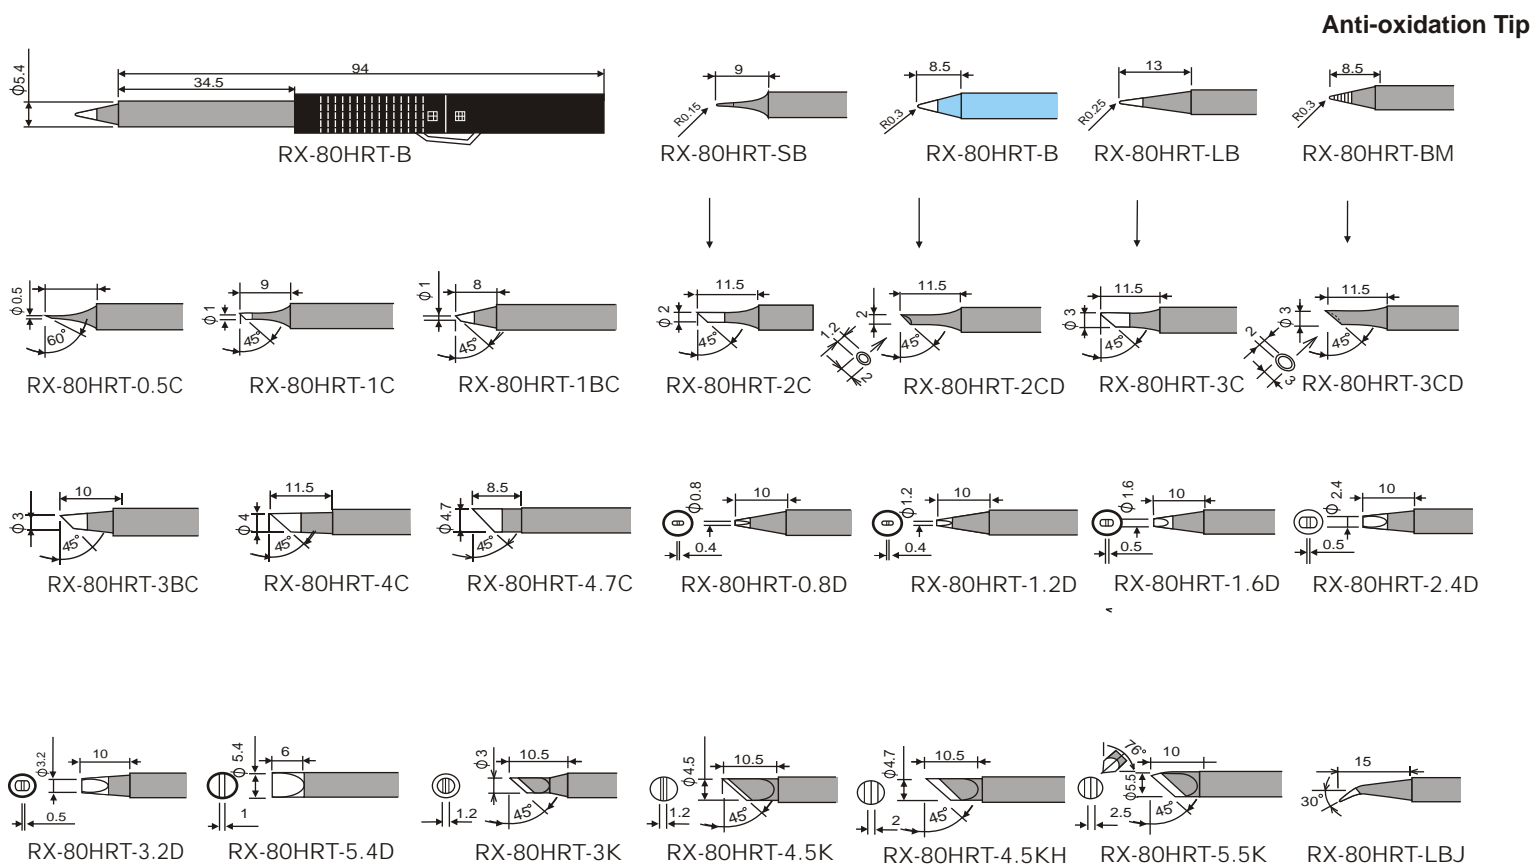

The RX-80HRT-2CD and RX-80HRT-3CD cannot be sold or used in the U.S. Therefore, please do not take them to or use them in the U.S.

From : goot, Japan Warranty : 1 year AMD

Web : www.advancetechonline.in

ADVANCE TECH SERVICES PVT. LTD. 709-710, GD-ITL Towers, B-8, Netaji Subhash Place, Pitampura, Ring Road, New Delhi 110 034 Ph : 011-47002024 upto 27, Fax : 011-47002029E-Mail : info@advancetechonline.in web:www.advancetechonline.in **B.O :** • Bangalore • Pune

PRODUCT RANGE: Soldering Desoldering for SMD/PTH, Solder POT, Electric Screw Drivers, Pneumatic Screw Driver, Torque Meter, Screw Torque deciders, Screw Feeders, Balancer, Torque Arm, Air Dispenser, Air Free Dispenser, Syringes and Barrel for dispenser, Flux, Spray Fluxer, Desolder Wick, Static Charge Meter, Ionizers, Ion Gun, Illuminated Magnifiers, Hand tools (Cutter, strippers, Pliers, crimper, Cable cutters etc.. ESD Products, Peelable Mask, Solder Bath Treatment, Rework Pens (Conductive pen, flux pen, green over coat pen, conformal coating remover pen), Imported stations soldering bits, Bit Cleaning sponge, Screw driver bits and many more.....